

03-17-00

A

03/16/00
jc781 U.S. PTO**UTILITY PATENT APPLICATION TRANSMITTAL**
(Large Entity)*(Only for new nonprovisional applications under 37 CFR 1.53(b))*Docket No.
14531.55.1Total Pages in this Submission
45**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

A SYSTEM AND METHOD FOR EFFICIENTLY TUNING TO CHANNELS OF A VARIETY OF DIFFERENT BROADCAST TYPES

and invented by:

Robert M. Fries and Michael E. Pietraszak

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☐ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 45 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☒ Cross References to Related Applications *(if applicable)*
 - c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
 - d. ☐ Reference to Microfiche Appendix *(if applicable)*
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings *(if drawings filed)*
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

jc525 U.S. PTO
09/526628
03/16/00

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
14531.55.1

Total Pages in this Submission
45

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☒ Formal Number of Sheets 9
- b. ☐ Informal Number of Sheets _____
4. ☐ Oath or Declaration
- a. ☐ Newly executed (original or copy) ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☐ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing

☐ First Class ☒ Express Mail (Specify Label No.): EL 417 646 046 US

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
14531.55.1

Total Pages in this Submission
45

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)


16. ☐ Additional Enclosures (please identify below):

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	37	- 20 =	17	x \$18.00	\$306.00
Indep. Claims	6	- 3 =	3	x \$78.00	\$234.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$1,230.00

- ☐ A check in the amount of _____ to cover the filing fee is enclosed.
- ☐ The Commissioner is hereby authorized to charge and credit Deposit Account No. _____ as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
 - ☐ Credit any overpayment.
 - ☐ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
 - ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).



Signature

Adrian J. Lee, Reg. No. 42,785
WORKMAN, NYDEGGER & SEELEY
1000 Eagle Gate Tower
60 East South Temple
Salt Lake City, Utah 84111
Telephone: (801) 533-9800
Fax: (801) 328-1707

Dated: March 16, 2000

CC:

TRANSMITTAL LETTER
(General - Patent Pending)

Docket No.
14531.55.1

In Re Application Of: Fries et al.

Serial No.
Not yet assigned

Filing Date
Herewith

Examiner
Not yet assigned

Group Art Unit
Not yet assigned

Title: A SYSTEM AND METHOD FOR EFFICIENTLY TUNING TO CHANNELS OF A
VARIETY OF DIFFERENT BROADCAST TYPES

TO THE ASSISTANT COMMISSIONER FOR PATENTS:

Transmitted herewith is:

Utility Patent Application (3 pgs); Patent Application (45 pgs); Nine (9) Sheets of Formal Drawings; Certificate of Mailing by Express Mail, No. EL 417 646 046 US; Postcard

in the above identified application.

- ☐ No additional fee is required.
- ☐ A check in the amount of _____ is attached.
- ☐ The Assistant Commissioner is hereby authorized to charge and credit Deposit Account No. _____ as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____
- ☐ Credit any overpayment.
- ☐ Charge any additional fee required.



Signature

Dated: March 16, 2000

Adrian J. Lee, Reg. No. 42,785
WORKMAN, NYDEGGER & SEELEY
1000 Eagle Gate Tower
60 East South Temple
Salt Lake City, Utah 84111
Telephone: (801) 533-9800
Fax: (801) 328-1707

I certify that this document and fee is being deposited on _____ with the U.S. Postal Service as first class mail under 37 C.F.R. 1.8 and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Signature of Person Mailing Correspondence

Typed or Printed Name of Person Mailing Correspondence

CC:

CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)

Applicant(s): Fries et al.

Docket No.

14531.55.1

Serial No.

Not yet assigned

Filing Date

Herewith

Examiner

Not yet assigned

Group Art Unit

Not yet assigned

Invention: A SYSTEM AND METHOD FOR EFFICIENTLY TUNING TO CHANNELS OF A
VARIETY OF DIFFERENT BROADCAST TYPES

I hereby certify that this Patent application and related documents

(Identify type of correspondence)

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under


37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231 on

March 16, 2000

(Date)

Peggy R. Huft

(Typed or Printed Name of Person Mailing Correspondence)



(Signature of Person Mailing Correspondence)

EL 417 646 046 US

("Express Mail" Mailing Label Number)

Note: Each paper must have its own certificate of mailing.

UNITED STATES PATENT APPLICATION

of

ROBERT M. FRIES

and

MICHAEL E. PIETRASZAK

for

**A SYSTEM AND METHOD FOR
EFFICIENTLY TUNING TO CHANNELS OF
A VARIETY OF DIFFERENT BROADCAST TYPES**

COOPER & SEELEY

WORKMAN, NYDEGGER & SEELEY
A PROFESSIONAL CORPORATION
ATTORNEYS AT LAW
1000 EAGLE GATE TOWER
60 EAST SOUTH TEMPLE
SALT LAKE CITY, UTAH 84111

BACKGROUND OF THE INVENTION

1. Cross-Reference to Related Applications

The present application is a non-provisional United States patent application based on a United States provisional patent application having a serial number 60/129,775, filed April 15, 1999, and entitled "Master Service Graph", which provisional application is incorporated herein by reference.

2. The Field of the Invention

The present invention relates to electrical computers and data processing systems. Specifically, the present invention relates to a system and method for efficiently tuning to channels of a variety of different broadcast types.

3. The Prior State of the Art

Multimedia data (e.g., audio, video, and other data) is broadcast using a variety of different transmission technologies.

One of the first major broadcast technologies is radio in which audio data is transmitted over terrestrial airwaves using an analog audio signal blended with a carrier wave. The analog audio signal is blended with the carrier wave in preparation for transmission by varying the amplitude of the carrier wave as in Amplitude Modulation (AM), or by varying the frequency of the carrier wave as in Frequency Modulation (FM). The blended carrier wave is then transmitted using an antenna over "terrestrial airwaves" meaning that the transmission occurs over the air without using a conductive medium and without the aid of an earth orbiting satellite. A radio receiver (also commonly referred to as simply a "radio") includes an antenna for receiving the blended carrier wave, a tuner for

1 extracting the analog audio signal from the carrier wave, and a speaker for converting the
2 analog audio signal into sound.

3 A radio station may be licensed to transmit using a carrier wave of a specified
4 frequency. For example, in the United States, AM radio stations may be licensed to
5 broadcast at a specific frequency within the range of from 530 kilohertz to 1.7 megahertz.
6 FM radio stations may broadcast at a specific frequency within the range of from 88
7 megahertz to 108 megahertz.

8 Early television technology uses similar technology as radio technology. However,
9 video data and audio data are both transmitted over terrestrial airwaves in the form of an
10 analog signal blended with a carrier wave. In the United States, Very High Frequency
11 (VHF) television channels 2 to 6 are typically transmitted using a carrier wave of a specific
12 frequency in the range of from 55 to 88 megahertz. VHF channels 7-13 use a specific
13 frequency in the range of from 174 to 216 megahertz. Ultra High Frequency (UHF)
14 channels 14-83 use a specific frequency in the range of from 470 to 890 megahertz. The
15 television receiver (also commonly called a "television") receives the television signal using
16 an antenna, extract the video and audio data from the carrier wave using a tuner, converts
17 the video data into video images using a display, and converts the audio data into sound
18 using a speaker.

19 In radio and early television technology, broadcasting occurs by transmitting signals
20 over terrestrial airwaves as described above. However, more recently, various other
21 broadcast mediums are used such as cable and satellite networks. In cable networks,
22 television and Internet data are transmitted over the cable network and to a television set or
23 computer connected to the cable network. In satellite networks, the television and Internet
24 data are transmitted to the television or computer using an earth orbiting satellite.

1 Until recently, television broadcasts used analog signals only. Currently, however,
2 digital television broadcasts are available via satellite using the Digital Video Broadcast
3 Satellite (DVB-S) standard. It is anticipated that in the near future, digital television
4 broadcasts will also be available using terrestrial airwaves and cable. The FCC has
5 mandated many aspects of the Advanced Television Standards Committee (ATSC) standard
6 for broadcasting digital television signals over terrestrial airwaves and cable.

7 As apparent from the above, there are numerous types of audio or video broadcast
8 types that either now exist or will likely exist including AM radio, FM radio, analog
9 terrestrial airwave, digital terrestrial airwave, analog cable, digital cable, analog satellite,
10 digital satellite and so forth. Some devices may be capable of receiving several of these
11 broadcast types. Typically, a special tuner is required for each broadcast type. Thus, in
12 order to tune to a desired channel, the viewer chooses the broadcast type in order to select
13 the tuner. Next, the viewer selects the channel within that broadcast type. Thus, in order to
14 tune to the desired channel, the viewer must have some knowledge about what channels are
15 contained within each broadcast type. Typically, however, a viewer may not have full
16 knowledge about what channels are offered on a certain broadcast type. This might
17 especially be the case in broadcast types that offer numerous channels.

18 Also, acquisition of a digital television signal is a multi-step operation that can be
19 significantly slow. For instance, once a tune request is received, the tuner first monitors the
20 digital video stream in order to extract tuning information such as the program number or
21 program identifier from the video stream. Once this necessary information is extracted, the
22 tuner can finally tune to the desired channel. The initial step of extracting the necessary
23 tuning information can take significant time. Thus, many consumers find that channel
24 changing across digital channels can be an annoyingly slow process.

1 Thus, what is desired is a system and method for more efficiently tuning to a desired
2 channel in a device that receives multiple broadcast types. Furthermore, it would be
3 desirable if such a system and method provided a faster tune to digital channels.
4
5

WORKMAN, NYDEGGER & SEELEY
A PROFESSIONAL CORPORATION
ATTORNEYS AT LAW
1000 EAGLE GATE TOWER
60 EAST SOUTH TEMPLE
SALT LAKE CITY, UTAH 84111

SUMMARY OF THE INVENTION

A tuning system that is capable of receiving a number of different broadcast types is described. These broadcast types might be analog or digital and may be via satellite, cable, the Internet, terrestrial airwave, and so forth.

The tuning system stores "service records" in a memory accessible by the tuning system. Each service record contains the complete set of information required to tune to a particular channel. For example, for an analog channel, the tuning information in a service record might include an identification of the tuner along with an identification of the channels such as call letters, a channel number, or a frequency. For a digital channel, the complete set of tuning information could include an identification of the tuner and other information usually found within the broadcast data stream (e.g., an MPEG-2 stream) such as a program identifier (i.e., PID), and a data structure of the data stream. In MPEG-2 digital broadcast, this information might be found in the Program Map Table (PMT) or in the Program Association Table (PAT) portions of the broadcast. Storing this complete set of tuning information saves considerable time tune-to-tune in digital channel changing since it is no longer necessary to extract tuning information from a sequence of tables represented in the digital video stream.

These service records are categorized within "service spaces" in any desired manner. One possible categorization is according to tuner type. For example, all channels obtainable by a cable tuner may be included in one service space, all channels obtainable by a satellite tuner may be included in another, and so forth. Further, service spaces may be independent of tuner type and may be categorized by some other parameter such as content. For example, service spaces may be dedicated to sports, news, children's television, educational channels, and so forth, regardless of what tuner is used to obtain that channel.

1 The service space may physically include a copy of the service record. However, to
2 conserve on memory, the service space contains pointers to each service record that is part
3 of that service space.

4 A viewer selects the service space in which the viewer desires to channel surf. The
5 viewer might then be presented with a graphical user interface which lists all channels
6 corresponding to the service records within that service space. Alternatively, no graphical
7 user interface is provided. Instead, the viewer uses a remote control or other input device to
8 channel up or down through the available channels that are provided by the service space.
9 Thus, if a viewer desires to view only designated "favorite" channels, the viewer selects a
10 "favorites" service space and selects the desired one of the favorite channels. In response to
11 this selection, the tuning system uses the information within the selected service record to
12 identify the correct tuner, and to cause that tuner to perform a tune of the selected channel.

13 This tuning system allows a viewer to quickly and efficiently channel surf through a
14 category of channels even if those channels correspond to a variety of different broadcast
15 types or tuners. Switching between broadcast types is automatic and does not require any
16 additional user input such as a broadcast or tuner identification. Thus, the user need not
17 memorize the channels associated with a particular broadcast or tuner. Instead, the channels
18 are neatly organized as desired by the user.

19 Furthermore, tuning information related to digital channels is also stored in the
20 service space. In a typical digital tuning system, the tuner obtains tuning information from
21 the digital data stream such as an MPEG-2 broadcast. Often, it takes significant time for the
22 tuner to extract the necessary tuning information from the digital broadcast data stream.
23 This results in noticeable and often annoying time delays in channel surfing. Once accurate
24 and reliable tuning information for a given channel is extracted from the digital video

1 stream, the tuning system described herein avoids time delay in digital tuning by quickly
2 retrieving this previously extracted information from a cache memory rather than slowly re-
3 extracting the information from the digital video stream. This information is validated and,
4 if necessary, updated after the tune is complete. Thus, viewers of digital programming may
5 obtain quick digital channel changes.

6 Additional objects and advantages of the invention will be set forth in the description
7 which follows, and in part will be obvious from the description, or may be learned by the
8 practice of the invention. The objects and advantages of the invention may be realized and
9 obtained by means of the instruments and combinations particularly pointed out in the
10 appended claims. These and other objects and features of the present invention will become
11 more fully apparent from the following description and appended claims, or may be learned
12 by the practice of the invention as set forth hereinafter.
13

WORKMAN, NYDEGGER & SEELEY
A PROFESSIONAL CORPORATION
ATTORNEYS AT LAW
1000 EAGLE GATE TOWER
60 EAST SOUTH TEMPLE
SALT LAKE CITY, UTAH 84111

KEY

MAN, NYDEGGER & SE
A PROFESSIONAL CORPORATION
ATTORNEYS AT LAW
1000 EAGLE GATE TOWER
60 EAST SOUTH TEMPLE
SALT LAKE CITY, UTAH 84111

WORK

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

In accordance with the present invention, a tuning system that is capable of receiving a number of different broadcast types is provided. These broadcast types might be analog or digital and may be via satellite, cable, Internet, terrestrial airwave broadcast, and so forth. The tuning system stores service records containing information required for tuning to a particular channel. These service records are categorized within service spaces in any desired manner. One possible categorization is according to tuner type. For example, all channels obtainable by a cable tuner may be included in one service space, all channels obtainable by a satellite tuner may be included in another, and so forth. Further, service spaces may be independent of tuner type and may be categorized by some other parameter such as content. For example, service spaces may be dedicated to sports, news, children's television, educational channels, and so forth, regardless of what tuner is used to obtain that channel. A viewer can select that service space and channel surf through the service space without having to specify the tuner or broadcast type used to obtain that channel.

The invention is described below by using diagrams to illustrate either the structure or processing of embodiments used to implement the system and method of the present invention. Using the diagrams in this manner to present the invention should not be construed as limiting of its scope. The embodiments of the present invention may comprise a special purpose or general purpose computer including various computer hardware, as discussed in greater detail below. The embodiments may further comprise multiple computers linked in a network environment.

Embodiments within the scope of the present invention also include computer readable media having stored thereon program code means such as executable instructions or data fields. Such computer readable media can be any available media which can be

1 accessed by a general purpose or special purpose computer. By way of example, and not
2 limitation, such computer readable media can comprise RAM, ROM, EEPROM, CD-ROM
3 or other optical disk storage, magnetic disk storage or other magnetic storage devices, or any
4 other medium which can be used to store the desired executable instructions or data fields
5 and which can be accessed by a general purpose or special purpose computer. Such
6 computer readable media may also comprise a smart card. Combinations of the above
7 should also be included within the scope of computer readable media. Executable
8 instructions comprise, for example, instructions and data which cause a general purpose
9 computer, special purpose computer, or special purpose processing device to perform a
10 certain function or group of functions.

11 Although not required, the invention will be described in the general context of
12 computer-executable instructions, such as program modules, being executed by a personal
13 computer. Generally, program modules include routines, programs, objects, components,
14 data structures, etc. that perform particular tasks or implement particular abstract data types.
15 The invention will also be described by making reference to documents or records, which
16 generally include or are defined by encoded data structures stored in a computer-readable
17 medium or a computer memory device. The encoded data structures of records often
18 represent words, numbers, or other expression and generally may be generated, edited,
19 displayed and/or stored using a computer.

20 In one embodiment, the invention is used in a system known as WebTV®,
21 manufactured by WebTV Networks, Inc., of Palo Alto, California, which uses a
22 conventional television screen or another display unit in combination with a networked
23 computer for composing, sending and receiving e-mail, browsing the World Wide Web
24 (Web), accessing other segments of the Internet, and otherwise displaying information. A

1 WebTV[®] system uses standard telephone lines, Integrated Services Digital Network (ISDN)
2 lines, cable lines associated with cable television service, or the like to connect to the
3 Internet or other wide area networks.

4 Figure 1 schematically illustrates an environment 100 that represents a suitable
5 operating environment for the present invention. The environment 100 includes a tuning
6 system 102 that is capable of tuning to channels of a plurality of broadcast types whether the
7 channel includes an audio signal, a video signal, another data signal, or any combination of
8 these signals. The tuning system 102 may be a personal computer, a set top box for a
9 television, an integrated unit within a television, or any other device that receives signals of
10 more than one broadcast type. In one embodiment, the tuning system 102 is a WebTV[®]
11 client.

12 The tuning system 102 includes a means and step for receiving a plurality of
13 different broadcast types. This means for receiving may include any device or combination
14 of devices capable of receiving one or more broadcast types. The present invention is not
15 limited to any particular device or combination of devices. By way of example only, the
16 means for receiving is shown in Figure 1 as the combination of devices enclosed by the
17 dashed box 120.

18 The combination of devices may include one or more antennas for receiving
19 channeled signals over terrestrial airwaves. For example, a radio antenna 104 receives radio
20 signals (e.g., AM radio, FM radio, CB radio, and so forth), an analog television antenna 106
21 for receiving analog television signals (e.g., VHF television and UHF television), and a
22 digital television antenna 108 received digital television signals (e.g., ATSC standard, NTSC
23 standard, DVB standard, and so forth). It should be noted that the function of several
24 antennas may often be combined into a single antenna as is known in the art.

1 The speaker device 124 may be any device capable of producing sound from an
2 audio signal. The speaker device 124 may be integrally positioned with respect to the
3 display device 122, or may be moveable with respect to the display device 122.

4 The input device 126 is communicatively coupled to the tuning system 102 so that
5 when a viewer uses the input device 126 to enter the instructions, the input device 126
6 generates a signal that is received by the tuning system 102, the signal representing the user
7 entered instruction. The input device 126 may be, for example, a remote wireless control
8 (i.e., a remote control) or a hardwired control device, and may be integrated with the tuning
9 system 102, or moveable with respect to the tuning system 102.

10 Figure 2 is a block diagram of the internal features of the tuning system 102 of
11 Figure 1. The operation of the tuning system 102 is controlled by a Central Processing Unit
12 (CPU) 202, which is coupled to an Application-Specific Integrated Circuit (ASIC) 204. The
13 CPU 202 executes software designed to implement features of the tuning system 102
14 including some of the features of the present invention. The ASIC 204 contains circuitry
15 which is used to implement certain functions of the tuning system 102. The ASIC 204 may
16 include more than one physical component such as a demodulator, any needed decoders
17 such as an MPEG decoder or other video decoders as appropriate to the broadcast signals
18 received. The ASIC 204 may also include a graphics processor for performing specialized
19 graphics functions on received video as needed. The details of the ASIC 204 are not
20 important to the implementation of the present invention as long as the tuning system 102 is
21 able to tune to a selected channel using service records.

22 Instructions, data, and other software necessary for the herein described operation of
23 the CPU 202 and ASIC 204 may be stored, for example, in a read-only memory (ROM) 206,
24 a random-access memory (RAM) 208, and/or a mass storage device 210. Mass storage

device 210 may be any mass memory means capable of storing large amounts of data such as a magnetic or optical disk drive. The ROM 206, the RAM 208 and the mass storage device 210 are communicatively coupled to the ASIC 204 so as to be readable by the ASIC 204 and so that data may be written from the ASIC 204 to the RAM 208 and possibly to the mass storage device 210.

The tuning system 102 also includes a number of tuners which are designed to tune to particular broadcast types. Table 1 lists the tuners in the left column, the receiving device that the tuner is attached to in the middle column, and the function of the tuner in the right column.

Tuner Name	Attached Receiving Device	Tuning Function
Radio Tuner 212	Radio Antenna 104	Radio (e.g., AM, FM, CB)
Analog Television Tuner 214	Analog Television Antenna 106	Analog Television (e.g., VHF, UHF)
Digital Television Tuner 216	Digital Television Antenna 108	Digital Television (e.g., ATSC, NTSC, DVB)
Analog Cable Tuner 218	Analog Cable 110	Analog Tuning (e.g., television, radio)
Digital Cable Tuner 220	Digital Cable 112	Digital Tuning (e.g., television, radio)
Analog Satellite Tuner 222	Analog Satellite Dish 114	Analog Tuning (e.g., radio and television)
Digital Satellite Tuner 224	Digital Satellite Dish 116	Digital Tuning (e.g., radio and television)
Internet Tuner 226	Internet Connection 118	Internet Tuning (e.g., POTS, cable, satellite, ISDN, T-1, T-2, T-3)

Table 1

The tuning system 102 of Figures 1 and 2 can have access to a variety of different broadcast types including radio terrestrial airwave (i.e., traditional radio), analog television

1 terrestrial airwave (i.e., traditional television), analog cable (e.g., traditional cable
2 television), digital cable, analog satellite, digital satellite, and Internet broadcasts. However,
3 a suitable tuning system for use with the present invention may also tune to just a subset of
4 these broadcast types.

5 In a typical tuning system that receives more than one broadcast type, the user must
6 first specify the broadcast type by selecting a tuner before selecting a channel. This tuner
7 selection can take some time. If the user is constantly switching between tuners, the tuner
8 selections can be burdensome and annoying. Furthermore, the user may often not have full
9 knowledge of what channels are available on a particular broadcast type. Thus, the user may
10 select a particular tuner only to find that the user is not interested in any of the channels
11 within that broadcast type. The present invention significantly reduces these difficulties by
12 eliminating the need to select a tuner and by categorizing channels according to any manner
13 desired by the user, not just by tuner or broadcast type.

14 Specifically, embodiments within the scope of the present invention include a means
15 or step for storing a plurality of service records. In this description and in the claims, a
16 “service record” is defined as a compilation of information needed to tune to a channel.
17 This channel may be a television, radio, or data channel. In additional, a Web page is also
18 included within the definition of a channel in which case “tuning to” the Web page would
19 involve downloading the Web page over a network such as the Internet. A “tuner” for
20 tuning to a Web page would be a network connector such as a modem, a network card, or
21 any other device capable of receiving Web pages over a network.

22 While, the information in the service record includes tuning information, the service
23 record may also optionally including other information such as the name and number of the
24 corresponding channel. In the embodiment of Figures 1 and 2, the tuning system 102 stores

1 service records in ROM 206, RAM 208, or mass storage device 210. However, one skilled
2 in the art will recognize that any memory having sufficient capacity can also store the
3 service records.

4 Figure 3 illustrates several service records 301-310. For clarity, assume that the
5 tuning system 102 has access to three different broadcast types and associated tuners
6 including analog cable, DVB-S satellite television, and terrestrial airwave television. Each
7 service record 301-310 includes an associated identifier 301a-310a that is used by the tuning
8 system 102 to identify the service, and includes other tuning information 301b-310b,
9 respectively. Some of the service records (namely, service records 301-304) are for tuning
10 to channels of analog cable television. Service records 305-307 are for tuning to channels of
11 digital satellite television. The remaining service records 308-310 are for tuning to
12 traditional terrestrial airwave television.

13 Service records 301-304 and 308-310 are for tuning to analog channels. In order to
14 tune to a channel of an analog broadcast types such as analog cable television or traditional
15 terrestrial airwave television, all that is needed is an identification of the broadcast type (i.e.,
16 a tuner identification) and an identification of the channel. This channel identification could
17 be in the form of a channel number (Channel 2, 3, 4, 5, and so forth), in the form of a
18 frequency, in the form of call letters, or any other form that identifies the channel.

19 Service records 305-307 are for tuning to digital channels. In order to tune to a
20 channel of a digital broadcast type such as digital satellite television, the service records
21 305-307 include an identification of the broadcast type or tuner. The service records 305-
22 307 may also include a channel identification such as a channel number. This is the
23 minimum information needed to tune to the digital channel. The tuner can extract any other
24 tuning information from the digital broadcast itself.

1 Unfortunately, the extraction of this tuning information from the digital broadcast
2 can take significant time. Specifically, in MPEG-2, the program number and program
3 identifier (i.e., PID) are found in the Program Association Table (PAT) portion of the video
4 stream. Furthermore, the bit stream type (e.g., audio, video, control, and so forth) and
5 location are found in the Program Map Table (PMT) portion of the video stream. Thus,
6 the tuner must monitor the video stream first to obtain the information before a tune can
7 occur. If the user changes channels frequently, the user may be inconvenienced by the
8 constant delay between channel changes. This is why channel changes in conventional
9 digital television devices are rather sluggish, especially when channel changes occur
10 frequently.

11 In accordance with the present invention, the tuning system 102 does not always
12 need to monitor the digital broadcast to extract tuning information. Instead, the service
13 records 305-307 may also include the tuning information that is normally extracted from the
14 digital broadcast itself. In this case, the digital tuning occurs faster and channel surfing is
15 less sluggish than in conventional digital tuning systems.

16 A service record for a Web page might include, for example, the Uniform Resource
17 Identifier for the Web page or any other information needed to access the Web page. While
18 the present invention may be used to access Web pages, the remainder of this description
19 will focus primarily on a tuning system in which broadcast channels are tuned to and
20 accessed.

21 Embodiments within the scope of the present invention also includes a means or step
22 for categorizing these service records 301-310 into service spaces. In this description and in
23 the claims, a "service space" is defined as a collection of service records. In the

1 embodiment of Figure 3, service spaces 311-315 are composed of pointers to all the service
2 records included in the service space.

3 The service spaces may have any desired characterization. For example, the service
4 spaces may be characterized according to tuner or broadcast type. For example, service
5 space 311 includes all cable television service records 301-304, service space 313 includes
6 all satellite television service records 305-307, and service space 315 includes all airwave
7 television service records 308-310. The service spaces may also be characterized according
8 to desirability such as in service space 312 which includes the viewers favorite service
9 records 303, 305 and 308. There is also a "master" service space which includes all service
10 records 301-310 as does the "master" service space 314. The service spaces may also be
11 characterized according to content such as sports, cartoons, news, movies, children,
12 educational, or by any other category desired by the viewer.

13 The dotted arrowed lines in Figure 3 represent that the service space originating the
14 arrowed line includes a pointer for the service record indicated by the arrowed line. For
15 example the "favorites" service space 312 includes pointers A, B, and C for pointing to
16 service records 303, 305 and 308, respectively. The other service spaces 311-313 and 315
17 contain similar pointers for pointing to their respective service records. For clarity, the
18 individual pointers for the "master" service space 314 is not shown. However, arrow line
19 316 represents all of the pointers of the "master" service space 314.

20 Note that each service records may be shared with several service spaces. For
21 example, service record 303 is shared by the cable television service space 311, the
22 "favorites" service space 312, and the "master" service space 314. Thus, memory is
23 conserved since each service space only contains a pointer for the service record, rather than
24 the entire service record.

Specifically, a graphical user interface as shown in Figure 4 may be displayed on the display device 122. Each of the titles of the service spaces 311-315 is displayed such as cable service space title 411, “favorites” service space title 412, satellite service space title 413, “master” service space title 414, and airwave television service space title 415, respectively. As an alternative to initially displaying the service space titles 411-415, the “master” service space 314, or another service space 311-313 or 315 may be selected as the default service space thereby eliminating the need to select a service space when channel surfing is desired within the default service space. In this case, the other service spaces may be selected by inputting a predetermined input signal from the input device 126. Returning

1 to the embodiment of Figure 4, a viewer may select a service space (e.g., "favorites" service
2 space 312) by activating the selecting the appropriate service space title (e.g., the "favorites"
3 service space title 412) using the input device 126. The selection of the "favorites" service
4 space 312 is indicated by the position of the arrow 416 on the graphical user interface.

5 Figure 5 shows a graphical user interface displayed on the display device 122 in
6 response to a selection of the "favorites" service space 312 of Figure 4. In response the
7 selection, the pointers of all of the service records in the "favorites" service space 312 are
8 used to obtain a description of the channel corresponding to the service records within the
9 service space 312 including service records 303, 305 and 308. The resulting description is
10 then displayed on the display device 122. In the example shown in Figure 5, the favorite
11 service records 303, 305 and 308 correspond to a description 503 of the gardening channel, a
12 description 505 of the weeding channel, and a description 508 of the trimming channel,
13 respectively.

14 Specifically, the pointer A of the "favorites" service space is used to obtain a
15 description 503 contained in the service record 303. Pointers B and C are used to obtain
16 descriptions 505 and 508 of service records 305 and 308, respectively. The descriptions A,
17 B, C, might include the channel number, call letters, frequency, or any other identifying
18 information recording the channel corresponding to the service space. In the example of
19 Figure 5, the descriptions 503, 505 and 508 represent a channel title.

20 The viewer may now use the input device 126 to select the desired channel. For
21 example, assume the viewer indicates the "gardening channel" description 503. The
22 controller 330 then determines that the viewer has selected the channel corresponding to the
23 service record 303. The controller then tunes to the corresponding channel using a means or
24 step for tuning to a channel corresponding to the selected service record using the tuning

1 information provided in the service record. This means for tuning is described further
2 below.

3 In another example of a means or step for receiving a selection of one of the service
4 records in one of the service spaces, after the service space is selected as in Figure 4 and the
5 accompanying description, the input device 126 is used to channel up or down through the
6 service records in the selected service space without the aid of a graphical user interface
7 such as that shown in Figure 5. For example, if the "favorites" service space 314 is selected
8 either actively or by default, the tuning system 102 may initially automatically tune to a
9 default channel such as the channel corresponding to the pointer A (i.e., service record 303)
10 using the means for tuning. Should the select the next channel, the pointer B is used to tune
11 to the channel corresponding to the service record 305 using the means for tuning. Another
12 selection of the next channel might cause pointer C to be used to tune to the channel
13 corresponding to the service record 308 using the means for tuning. Another might cause
14 the tuning to wrap forward to pointer A for tuning to the service record 303 using the means
15 for tuning.

16 Starting at the default pointer A, should the viewer select the previous channel, the
17 tuning may wrap back to pointer C for tuning to the channel corresponding to the service
18 record 308 using the means for tuning. Another previous channel selection might cause
19 pointer B to be used to tune to the channel corresponding to service record 305 using the
20 means for tuning.

21 From having read this disclosure, one skilled in the art will recognize that there are
22 many other ways to assist a viewer in selecting the desired channel within the desired
23 service space.

1 Once the selection of the desired service records is received, the controller 330 tunes
2 to the selected service records using a means or step for tuning to a channel corresponding to
3 the selected service record using the tuning information provided in the service record.
4 Specifically, the controller 330 uses the information within the selected service record to
5 select the appropriate tuner and to tune to the corresponding channel.

6 For example, service records 301-304 include an indication that the channels are
7 tunable through the cable tuner 331, service records 305-307 include an indication that the
8 channels are tunable through the DVB-S tuner 332, and service records 308-310 include an
9 indication that the channels are tunable through the terrestrial television tuner 333.
10 Once the correct tuner is selected, the other tuning information within the selected service
11 record is used to tune to the desired channel. This other tuning information will differ
12 depending on the tuner type and has been described above with respect to the means or step
13 for storing a plurality of service records and Figure 3.

14 Note that the "favorites" service space 312 contains service records of a variety of
15 different broadcast types including analog cable, digital satellite and analog terrestrial
16 airwave. Also, tuning to the channels within the "favorites" service space requires the use of
17 several tuners such as cable tuner 331, DVB-S tuner 332, and terrestrial television tuner 333
18 (see Figure 3). Conventionally, to change channels between broadcast types, a viewer
19 would have to select the broadcast type as well as the channel within the broadcast type.
20 However, as described above with the present invention, the viewer may change channels
21 within a service space but between broadcast types by issuing a simple channel change
22 instruction. The viewer need not be concerned with the particular broadcast type which
23 delivers the desired channel. Thus, the present invention simplifies the tuning experience
24 for the viewer for tuning systems that receive multiple broadcast types.

1 Up to this point, this description has assumed the existence of the service records
2 301-310. In order to obtain these service records 301-310, embodiments within the scope of
3 the present invention include means or step for accumulating the plurality of service records
4 301-310. An example of a method for accumulating the plurality of service records is
5 shown in Figure 6.

6 The service records 301-310 may be initially accumulated by each tuner 331-333
7 monitoring the digital data stream or analog broadcast (step 610) to determine which
8 channels are available (step 620). A channel may be determined to be available (step 620)
9 when the channel is tuned and a clear signal is received. Once a channel is determined to be
10 available (step 620), the tuning system 102 determines whether a service record already
11 exists for that channel (decision block 630). If a service record already exists (yes in
12 decision block 630), the method returns to step 620 where the next available channel is
13 determined. If a service record doesn't exist (no in decision block 630), a service record is
14 created for that channel (step 640), and the parameters used by the tuner to tune to that
15 channel are included in the service record (step 650). Then the method repeats for all
16 available channels for a given tuner, and for all tuners within the tuning system 102.

17 The tuning system 102 may repeat this method at predetermined intervals to detect
18 new available channels for each tuner. The method may be performed during low usage
19 times so as not to interfere with the viewer's normal viewing of the display device 122. In
20 addition, at the start of the predetermined interval when the tuning system 102 is to perform
21 the service record check, the tuning system 102 may optionally check to see if the tuning
22 system 102 is already in use. If not in use, the tuning system 102 will perform the method of
23 Figure 6 or another equivalent service record accumulation method. In addition, service
24 record accumulation may be terminated when the tuning system 102 detects that the viewer

1 is trying to use the tuning system 102. Thus, inconvenience to the viewer may be
2 minimized.

3 Figure 9 schematically shows a structure 900 for accumulating service records
4 according to the method of Figure 6. Each structure 900 includes a master service graph
5 (MSG) loader 902 for each broadcast type and for each tuner. The master service graph
6 loader is responsible for monitoring the broadcast for information representing the tuned
7 channel. Once a new channel is detected, the tuning information is provided to a master
8 service control 904 which creates a service record and includes the tuning information in the
9 service record. Additionally, the master service control 904 will include the new service
10 record in the master service space by adding a pointer to the master service space that points
11 to the new service record.

12 Figure 9 shows that each tuner type includes a corresponding loader for populating
13 the master service graph. Thus, as the tuner receives channel tuning information for a new
14 channel, the corresponding loader (or the master service control) creates the new service
15 record. In some cases, there may be channels that include aggregated system information
16 regarding a variety of different channels. For example, a clearinghouse entity may scan
17 available channels in a given region, compile the tuning information for those channels, and
18 transmit that aggregated tuning information over a single channel 906 to the tuning system.
19 In this case, the associated loader 908 would frequently receive tuning information over the
20 channel 906 related to a variety of different channels and would monitor for new channels
21 referenced in the aggregated systems information. This may be especially feasible in
22 broadcast specification such as High Definition Television (HDTV) in which case the
23 channel identification and system information is included within the channel.

1 beginning at 2:00 am on March 1, 2000, a given channel's broadcast source will change
2 from broadcaster XYZ to broadcaster WXY. Also, this may occur when a channel is
3 shared by different broadcasters with one broadcaster broadcasting during the day, and
4 another at night. Figure 8 illustrates a structure 800 that enables this time-dependent tuning.

5 A service space may have service records that are organized according to channel.
6 For example, service record 838 corresponds to a channel 38. If channel 38 is selected, the
7 information within the service record 838 is used to perform the tune. A service record 839a
8 correspond to channel 39. However, service record 839a includes time limitations and a
9 pointer P to another service record 839b. If the current time does not meet the time
10 conditions, then the pointer P is used to obtain the next service record 839b. If the time
11 conditions of service record 839b are not satisfied, the pointer P' is used to access service
12 record 839c and so forth until a service record 839d is found that does correspond to the
13 current time. Then, that service record 839d is used to tune to the appropriate program.

14 The present invention may also be used to implement "Near Video-On-Demand"
15 (NVOD). "Video-On-Demand" is a technology that allows a user to select a program such
16 as a movie for viewing and then almost immediately begin viewing the program. Video-On-
17 Demand thus requires that each possible program selection be configured to be immediately
18 available once selected. "Near Video-On-Demand" is also a technology that also allows a
19 user to select a program for viewing. However, the user may typically have to wait a little
20 while before the selected program is available. While there is some inconvenience in having
21 to wait for the program versus having the program immediately available, Near Video-On-
22 Demand does have the restraint that each possible program selection be configured to be
23 immediately available. Near Video-On-Demand thus allows more flexibility in accessing a

1 source for the selected program. In the example that follows, the source for the selected
2 program is one or more broadcast signals.

3 The implementation of Near Video-On-Demand using the principles of the present
4 invention will be illustrated with reference to Figure 10. The data structure 1000 is created
5 in response to a request to access (e.g., view or record) a certain program called
6 "PROGRAM XYZ" in the example of Figure 10. PROGRAM XYZ may represent a movie,
7 a talk show, a situation comedy episode, or any other desired broadcast segment.

8 In response to a request for PROGRAM XYZ, a service space is created for
9 PROGRAM XYZ such as PROGRAM XYZ service space 1002 if such a service space does
10 not already exist. Next, a search is performed to find all channels that are going to show
11 PROGRAM XYZ in a time period close to the current time if PROGRAM XYZ is to be
12 viewed as soon as possible, or in a time period close to some future time if PROGRAM
13 XYZ is to be viewed at some future time. In the example, the time of the request is assumed
14 to be 1:10 pm for illustrative purposes and it is also assumed that PROGRAM XYZ is to be
15 viewed as soon as possible. The search may evaluate any source of programming
16 information that may divulge what programs are being shown on what channels and at what
17 time. Such a source may include, for example, an Electronic Program Guide. In the
18 example of Figure 10, four channels are found that will show PROGRAM XYZ at a time
19 close to the current time. A service record is created for each channel showing PROGRAM
20 XYZ.

21 The first service record 1004 indicates that PROGRAM XYZ begins at 1:00 pm on
22 channel 180. The second service record 1006 indicates that PROGRAM XYZ will begin at
23 1:15 pm on channel 200. The third service record 1008 indicates that PROGRAM XYZ will
24 begin at 1:30 pm on channel 220. The fourth service record 1010 indicates that PROGRAM

1 XYZ will begin at 1:45 pm on channel 240. A pointer to each of these service records is
2 included in the PROGRAM XYZ service space 1002 thus creating the data structure 1000.

3 The data structure 1000 is then used to select the appropriate service record to be
4 used to tune. Since the current time is 1:10 pm, a logical choice of service records would be
5 service record 1006 since it requires the least waiting time for PROGRAM XYZ without
6 missing any of PROGRAM XYZ. The tuning information for the selected service record
7 1006 is then used to tune to the appropriate channel which is, in this case, channel 200. The
8 viewer would then wait for five minutes for PROGRAM XYZ to begin. The program would
9 begin at 1:15 pm and then would typically be viewed until the end time of the program
10 which is 2:15 pm being apparently a one-hour program.

11 The use of service records and service spaces according to the principles of the
12 present invention allows a great deal of flexibility in optimizing the viewing experience. For
13 example, suppose that in the example of Figure 10, that five minutes after the viewer begins
14 viewing PROGRAM XYZ on channel 200, the viewer is distracted by other matters such as
15 a 25 minute telephone call received at 1:20 pm. The user may then activate a pause function
16 in the tuning system. At 1:45 pm, 25 minutes later, the viewer returns to the tuning system
17 to continue viewing. When the viewer activates a resume function to continue viewing, the
18 tuning system intelligently determines the appropriate channel to return to, even if that
19 channel was not the one viewed at the time of the pause. In this case, the tuning system
20 assumes, or the viewer has indicated, that none of PROGRAM XYZ is to be missed. The
21 tuning system then determines what channel to tune to accomplish this objective. Service
22 record 1010 indicates that PROGRAM XYZ begins at the time the resume function is
23 activated at 1:45 pm. Thus, the tuning system uses service record 1010 to tune to channel
24 240 to resume viewing the program.

1 If the viewer is not to see the first five minutes of PROGRAM XYZ again, the tuning
2 system may determine the point in PROGRAM XYZ where the viewer activated the pause
3 function. In this case, that point is five minutes after the beginning of PROGRAM XYZ.
4 The tuning system would thus tune to channel 240 at 1:50 pm to resume PROGRAM XYZ
5 at precisely the point where the viewer paused PROGRAM XYZ. The viewer need never
6 know that the program was resumed on a different channel. From the viewer's perspective,
7 PROGRAM XYZ was provided automatically with some wait time between the request to
8 view and the beginning of the program, and with some wait time after the resume function
9 was activated until the program was resumed.

10 The present invention may be embodied in other specific forms without departing
11 from its spirit or essential characteristics. The described embodiments are to be considered
12 in all respects only as illustrative and not restrictive. The scope of the invention is,
13 therefore, indicated by the appended claims rather than by the foregoing description. All
14 changes which come within the meaning and range of equivalency of the claims are to be
15 embraced within their scope.

16 What is claimed and desired to be secured by United States Letters Patent is:
17

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23

5. The method according to Claim 4, wherein the step for accumulating the plurality of service records further comprises the following:

for each of the available channels, an act of creating a service record for the available channel if a service record does not already exist for the available channel.

6. The method according to Claim 5, wherein the step for accumulating the plurality of service records further comprises the following:

an act of including information that the tuner used to tune to the available channel in the service record.

7. The method according to Claim 3, wherein the step of accumulating the plurality of service records comprises:

- a specific act of providing a loader for each tuner in the tuning system;
- a specific act of using the loader to monitor the channels tuned to by the corresponding tuner for a new channel;
- a specific act of a master service control creating a new service record corresponding to the new channel; and
- a specific act of including the tuning parameters used to tune to the new channel in the new service record.

8. The method according to Claim 1, wherein the step for categorizing the plurality of service records into a plurality of service spaces comprises the following:

1
2
3
4
5
6
7

13. The method according to Claim 1, wherein the selected service record corresponds to a Web page.

14. The method according to Claim 13, wherein the tuning information provided in the selected service record includes a Uniform Resource Identifier.

WORKMAN, NYDEGGER & SEELEY
A PROFESSIONAL CORPORATION
ATTORNEYS AT LAW
1000 EAGLE GATE TOWER
60 EAST SOUTH TEMPLE
SALT LAKE CITY, UTAH 84111

1 15. In a tuning system for tuning to channels of a plurality of different broadcast
2 types, a computer program product for implementing a method of efficiently tuning to a
3 channel of one of the broadcast types without having to designate the broadcast type, the
4 computer program product comprising:

5 a computer readable medium for providing computer program code means
6 utilized to implement said method; and

7 wherein said computer program code means is comprised of executable code
8 for implementing the following:

9 a step for storing a plurality of service records, each service record
10 containing tuning information for tuning to a channel of one of the plurality
11 of broadcast types;

12 a step for categorizing the plurality of service records into a plurality
13 of service spaces;

14 a step for receiving a selection of one of the service records in one of
15 the service spaces; and

16 a step for tuning to a channel corresponding to the selected service
17 record using the tuning information provided in the service record.

18
19 16. The computer program product according to Claim 15, wherein the
20 executable code for implementing the step for storing further comprises executable code for
21 implementing the following:

22 an act of the tuning system storing information that identifies a tuner; and

23 an act of the tuning system storing information that identifies a channel
24 tunable by the tuner.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16

17. The computer program product according to Claim 15, wherein the executable code for implementing the step for storing further comprises the executable code for implementing the following:

a step for accumulating the plurality of service records.

18. The computer program product according to Claim 16, wherein the executable code for implementing the step for accumulating the plurality of service records comprises executable code for implementing the following:

an act of a tuner monitoring a broadcast to determine available channels;

for each available channel, an act of creating a service record for the available channel if a service record does not already exist for the available channel;
and

for each available channel, an act of including information that the tuner used to tune to the available channel in the service record.

- 1 19. A tuning system for tuning to channels of a plurality of different broadcast
- 2 types without requiring a user to identify the broadcast type, the tuning device comprising:
- 3 a first tuner for tuning to channels of a first broadcast type;
- 4 a second tuner for tuning to channels of a second broadcast type;
- 5 a memory;
- 6 a controller coupled to a memory, wherein the controller is configured to
- 7 store a plurality of service records and service spaces in the memory, each service
- 8 record containing tuning information for tuning to a channel of one of the plurality of
- 9 broadcast types, each service space listing at least one of the plurality of service
- 10 record.
- 11
- 12 20. The tuning system according to Claim 19, wherein each of the plurality of
- 13 service spaces contains a pointer to at least one of the plurality of service records.
- 14
- 15 21. The tuning system according to Claim 20, wherein at least one of the
- 16 plurality of service spaces contains pointers to a service record containing information for
- 17 tuning to a channel of the first broadcast type and a service record containing information
- 18 for tuning to a channel of the second broadcast type.
- 19
- 20 22. The tuning system according to Claim 19, further comprising the following:
- 21 a means for receiving a plurality of different broadcast types.
- 22

an act of the tuning system tuning to the selected channel using the tuning information of the accessed service record.

an act of the tuning system storing information that identifies a channel in each of the plurality of service records in the memory.

1 25. The method according to Claim 23, wherein the act of the tuning system
2 storing comprises the following:

3 an act of the tuning system accumulating the plurality of service records in
4 the memory.

5
6 26. The method according to Claim 25, wherein the act of the tuning system
7 accumulating the plurality of service records comprises the following:

8 an act of at least one tuner of the tuning system monitoring at least one
9 broadcast type to determine available channels in the at least one broadcast type.

10
11 27. The method according to Claim 23, wherein the act of the tuning system
12 categorizing the plurality of service records into a plurality of service spaces comprises the
13 following:

14 for each of the plurality of service records, an act of the tuning system storing
15 a pointer associated with the service record in at least one of the service spaces.

16
17 28. The method according to Claim 23, wherein the act of the tuning system
18 categorizing the plurality of service records into a plurality of service spaces comprises the
19 following:

20 an act of the tuning system creating a favorites service space for including
21 service records that correspond to desirable channels.

1 29. The method according to Claim 23, wherein the act of the tuning system
2 categorizing the plurality of service records into a plurality of service spaces comprises the
3 following:

4 an act of the tuning system including a plurality of service records of a
5 plurality of broadcast types within a single service space.

6
7 30. The method according to Claim 23, wherein the act of the tuning system
8 tuning to the selected channel using the tuning information of the accessed service record
9 comprises the following:

10 an act of the tuning system tuning to a selected digital channel corresponding
11 to the accessed service record using the tuning information provided in the accessed
12 service record.

13
14 31. The method according to Claim 23, wherein the selected service record
15 corresponds to a Web page.

16
17 32. The method according to Claim 31, wherein the tuning information provided
18 in the selected service record includes a Uniform Resource Identifier.

19

1 36. A method of creating a service record in a tuning system, the method
2 comprising the following steps:
3 receiving tuning information regarding an available channel over a broadcast;
4 creating a service record for the available channel; and
5 including the tuning information in the service record.

6
7 37. The method according to Claim 36, wherein the broadcast includes
8 information regarding available channels corresponding to a plurality of broadcast types.
9
10

WORKMAN, NYDEGGER & SEELEY
A PROFESSIONAL CORPORATION
ATTORNEYS AT LAW
1000 EAGLE GATE TOWER
60 EAST SOUTH TEMPLE
SALT LAKE CITY, UTAH 84111

G:\DATA\PAT\WORDPAT\14531551.DOC

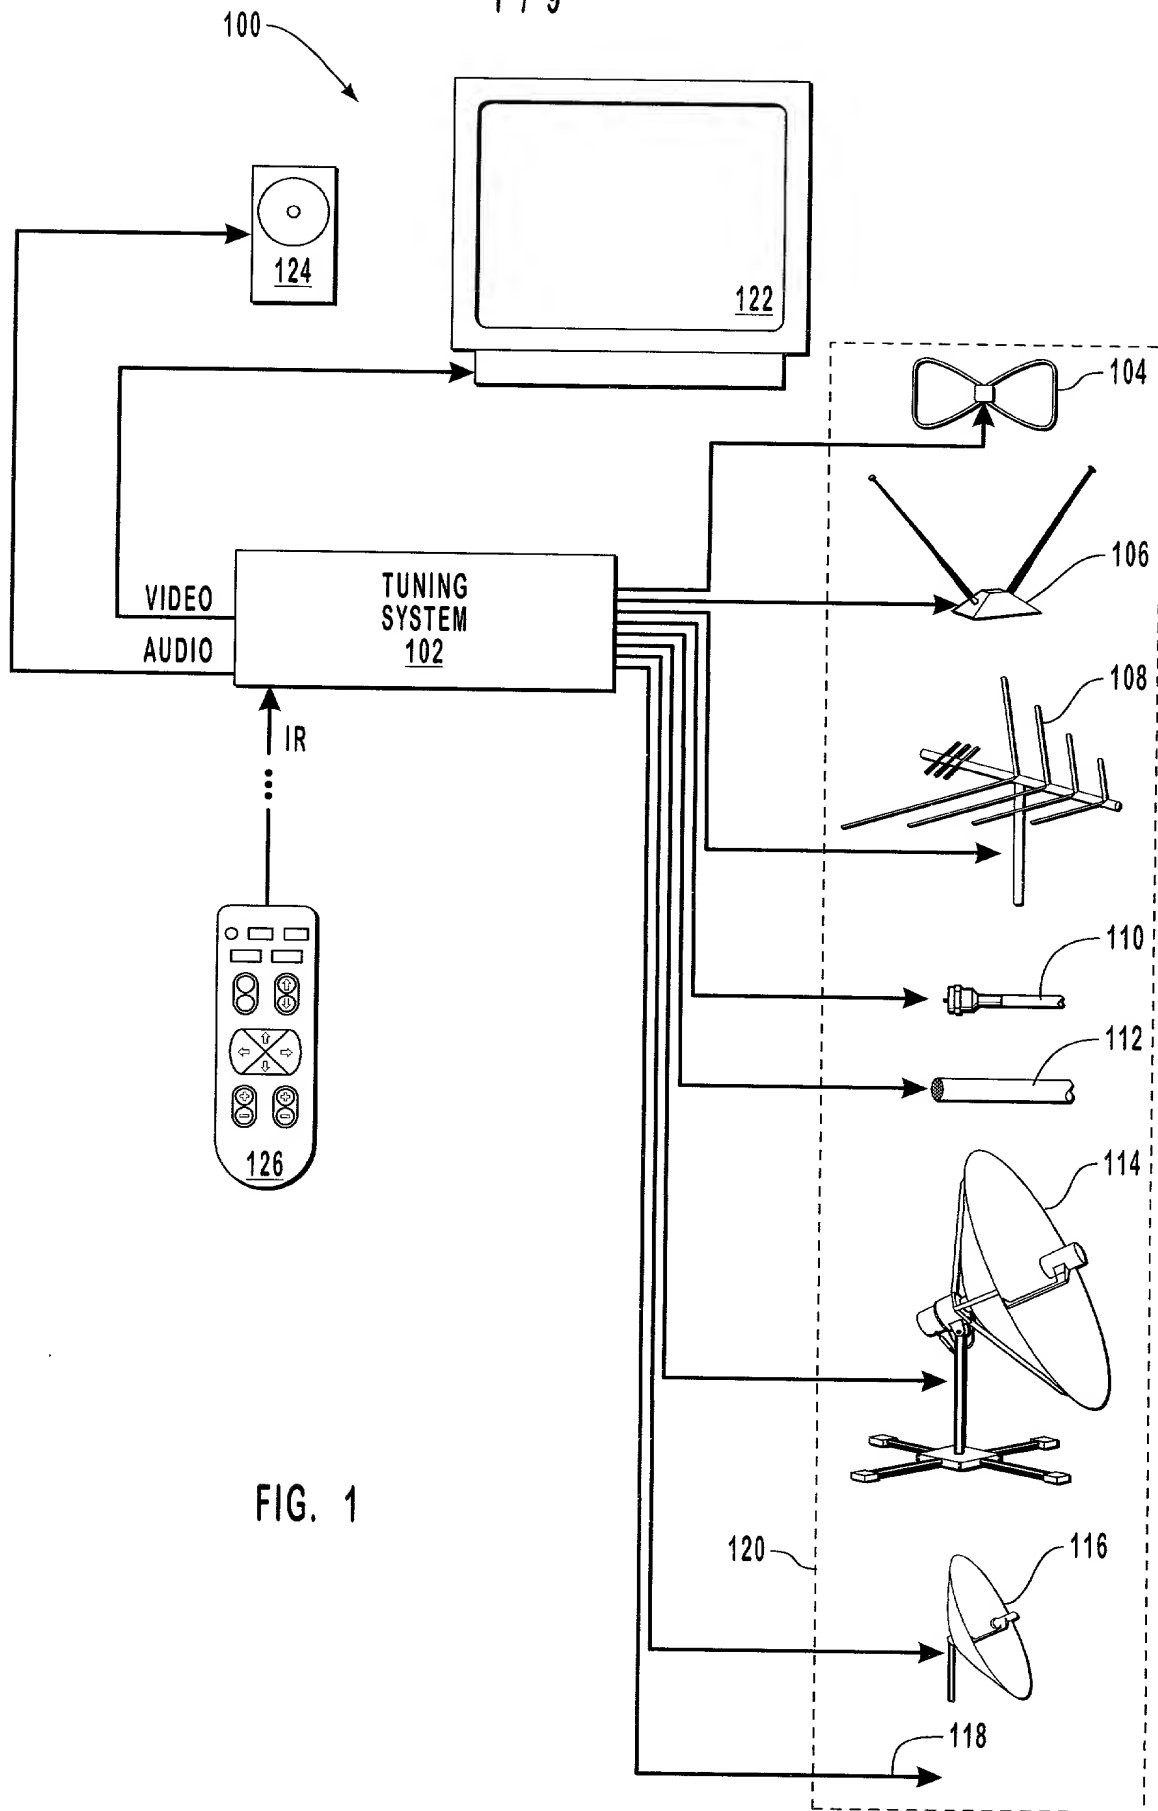


FIG. 1

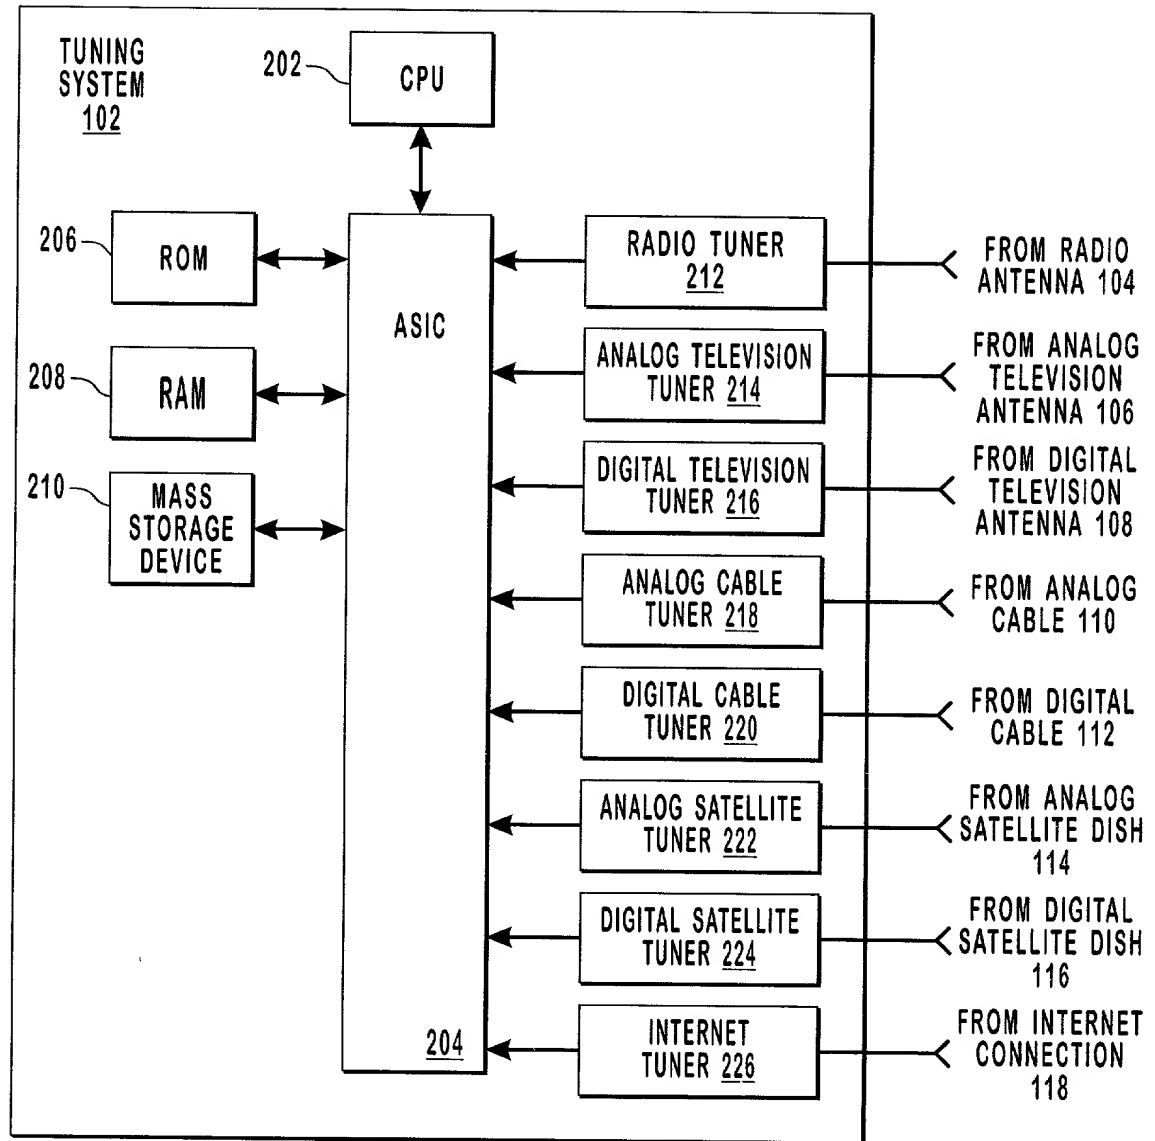


FIG. 2

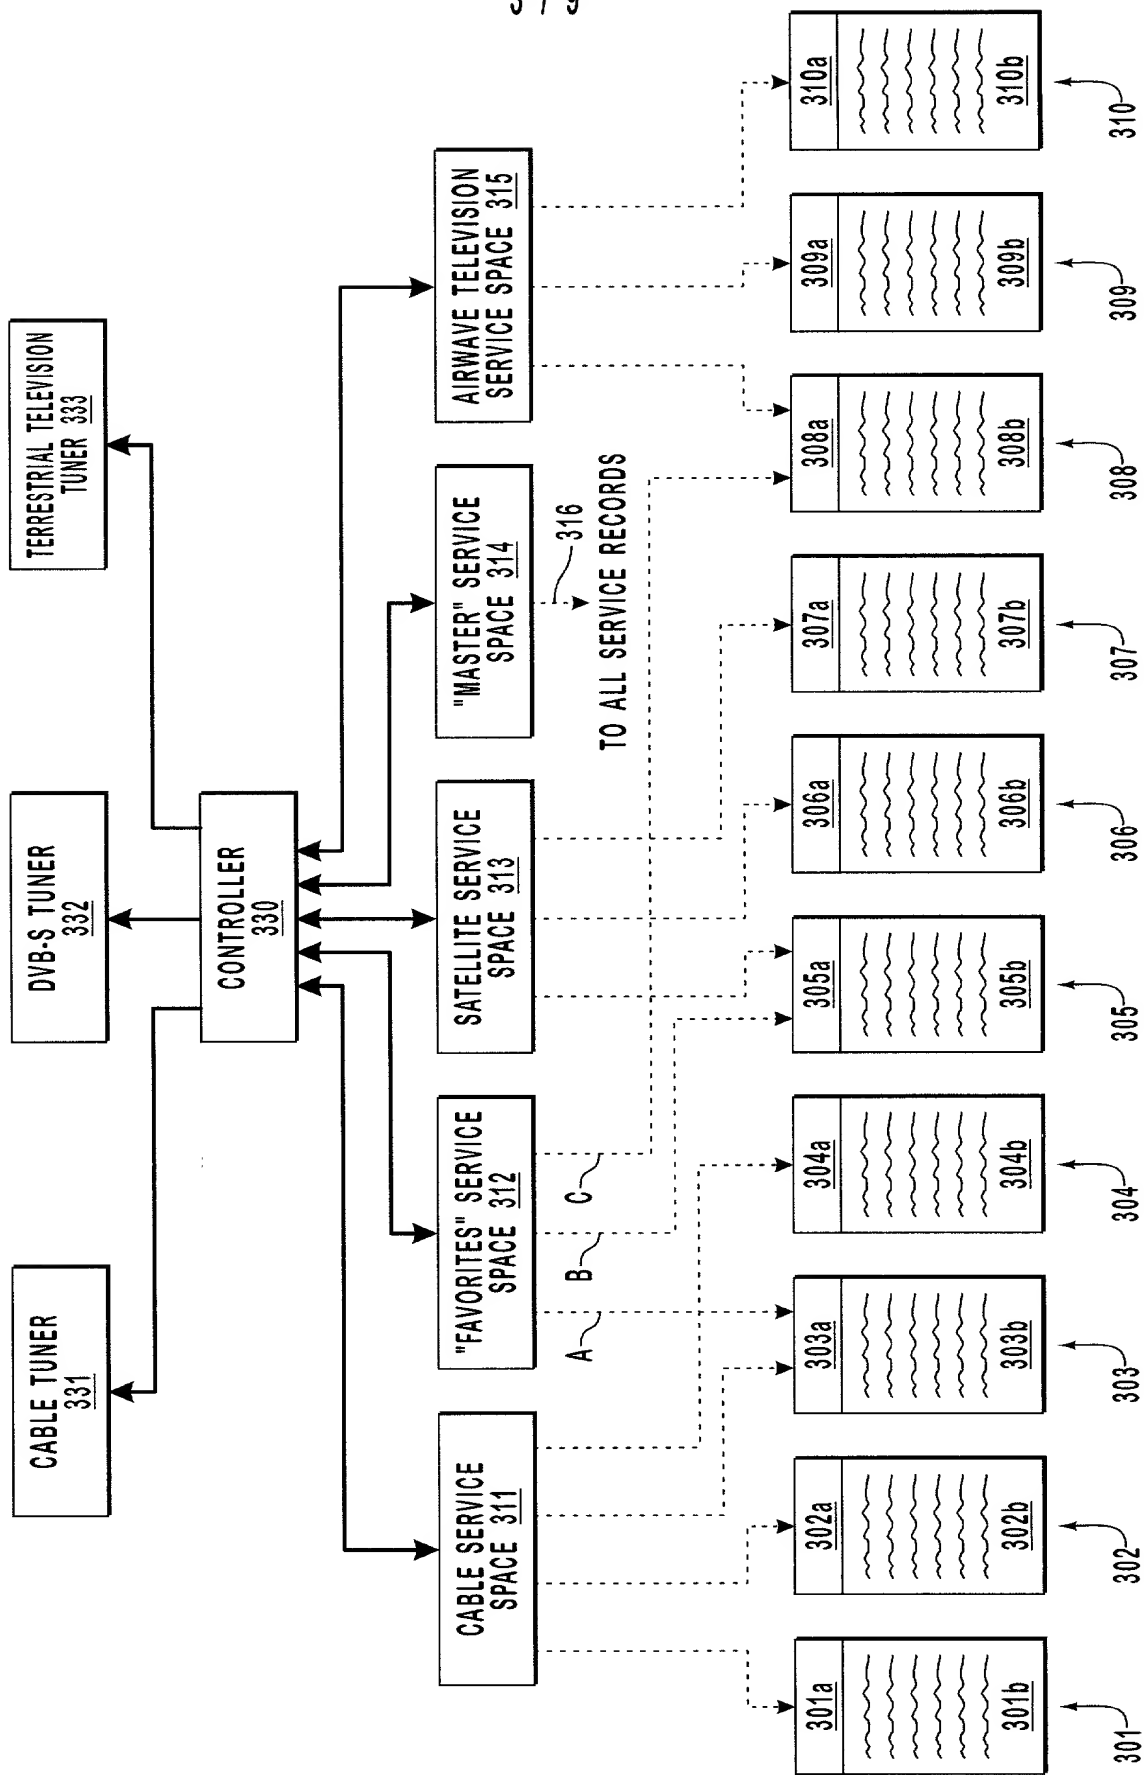


FIG. 3

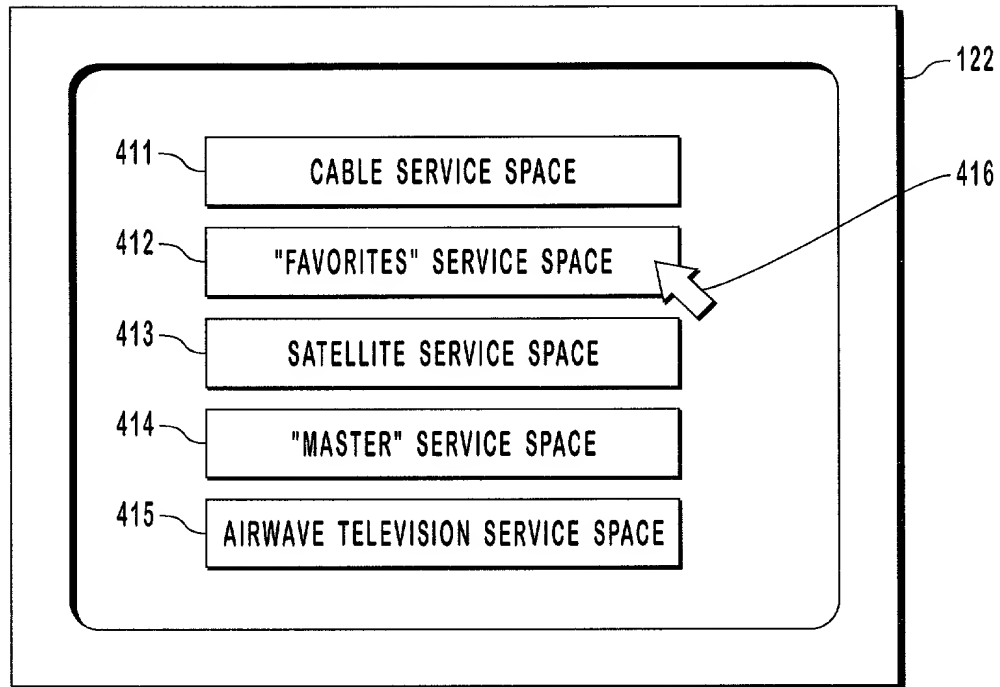


FIG. 4

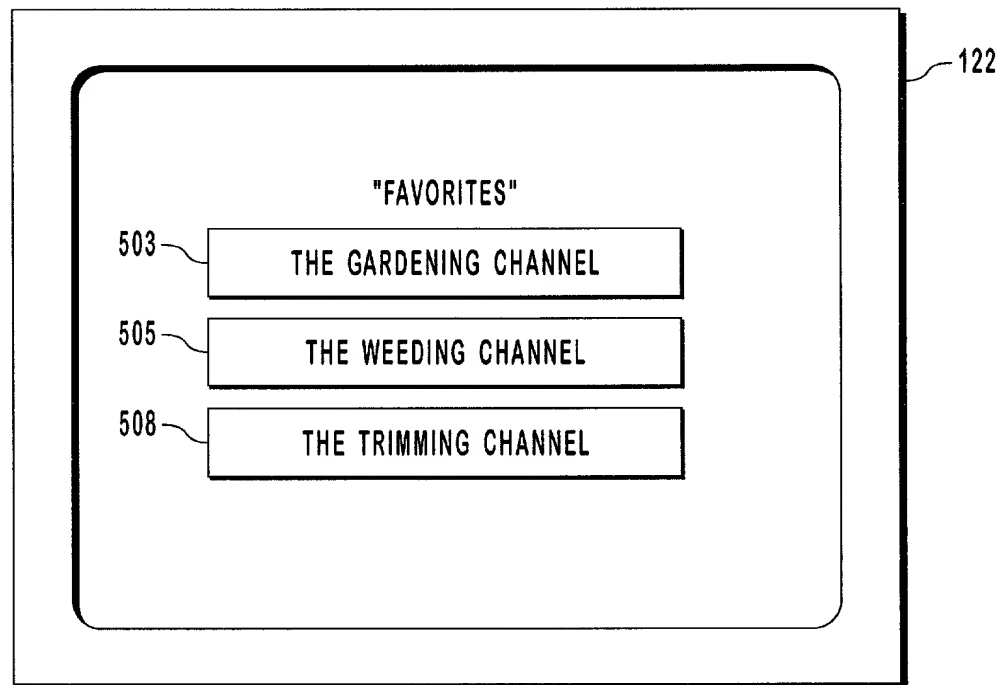


FIG. 5

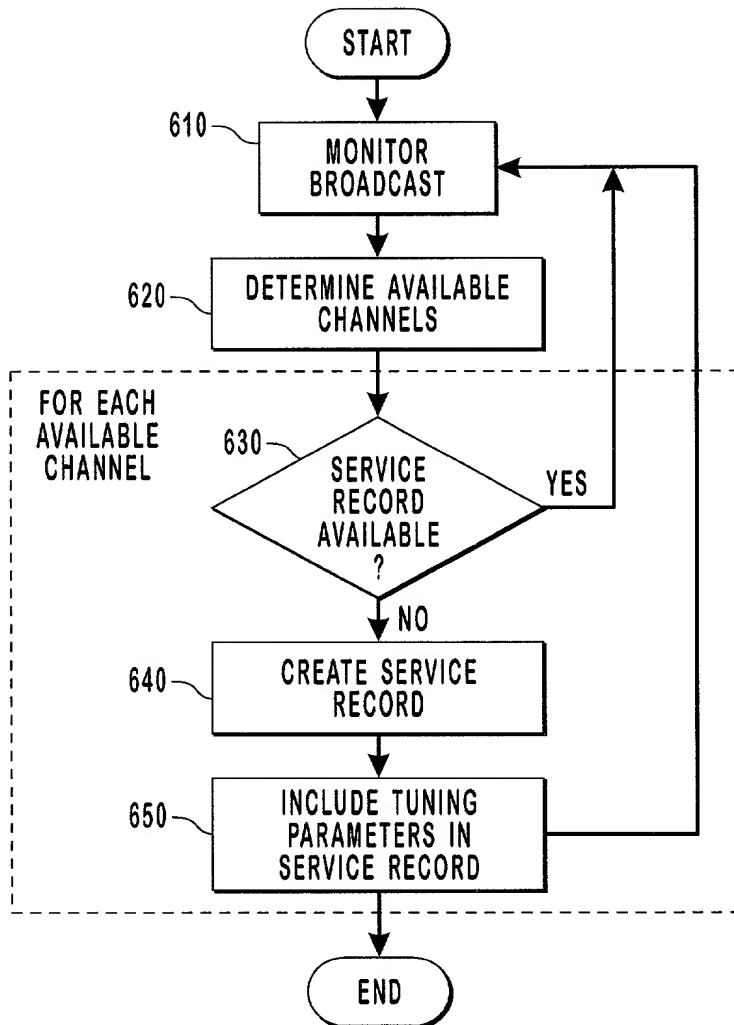


FIG. 6

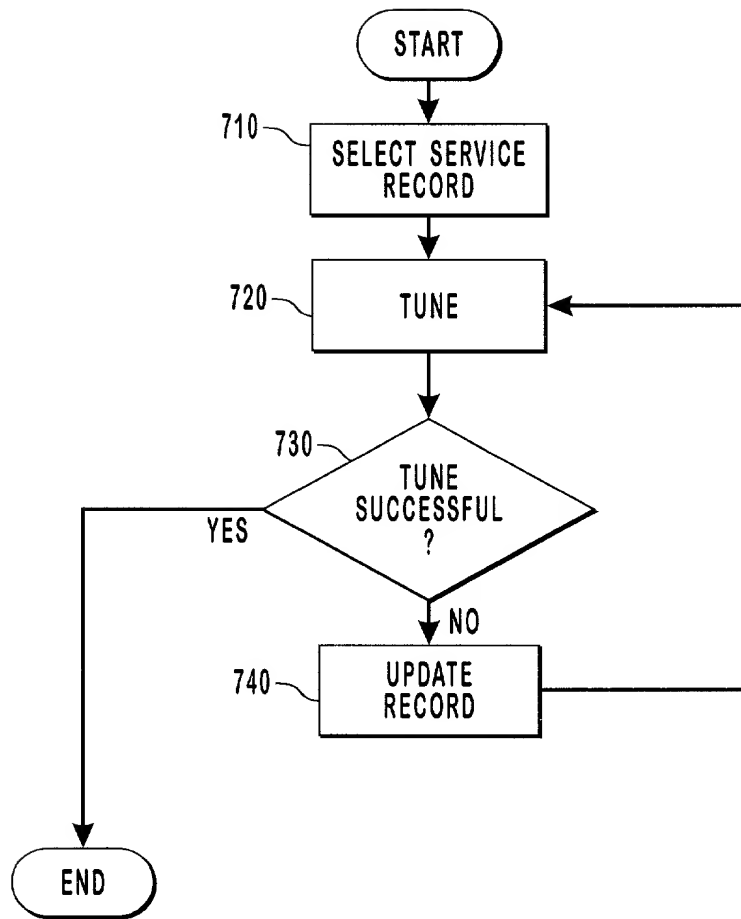


FIG. 7

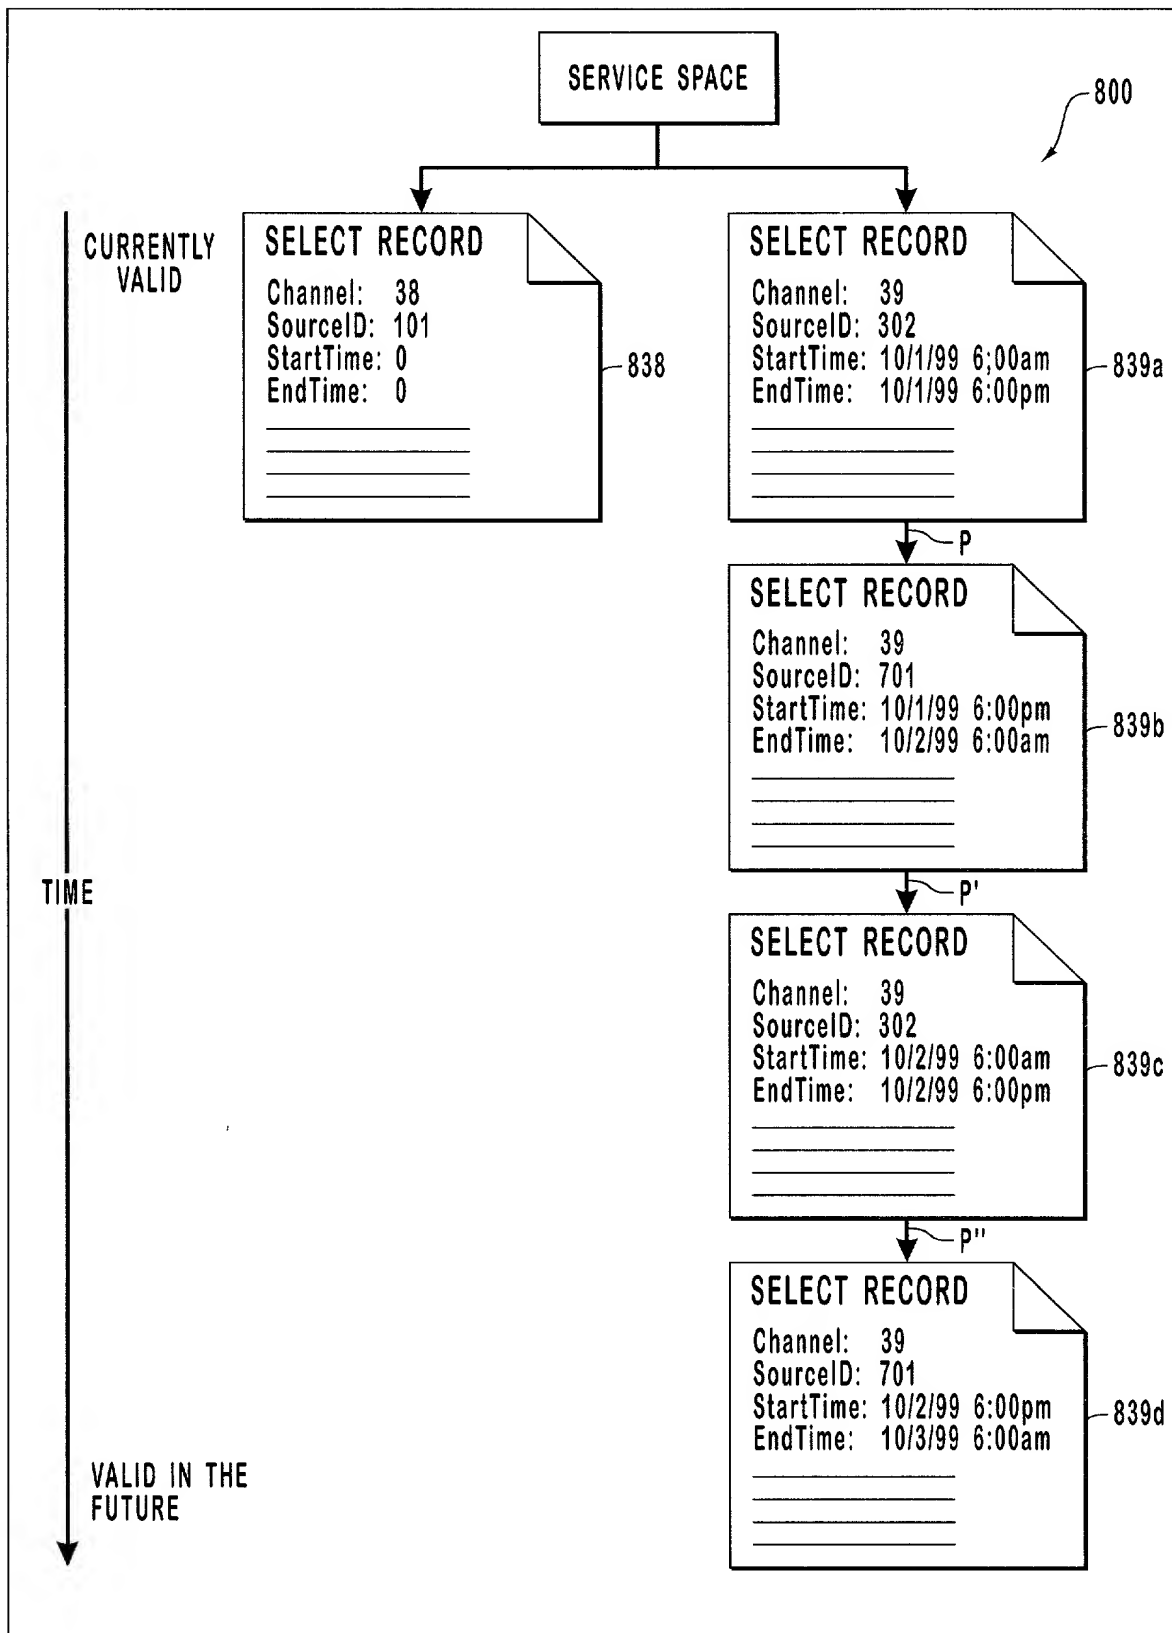


FIG. 8

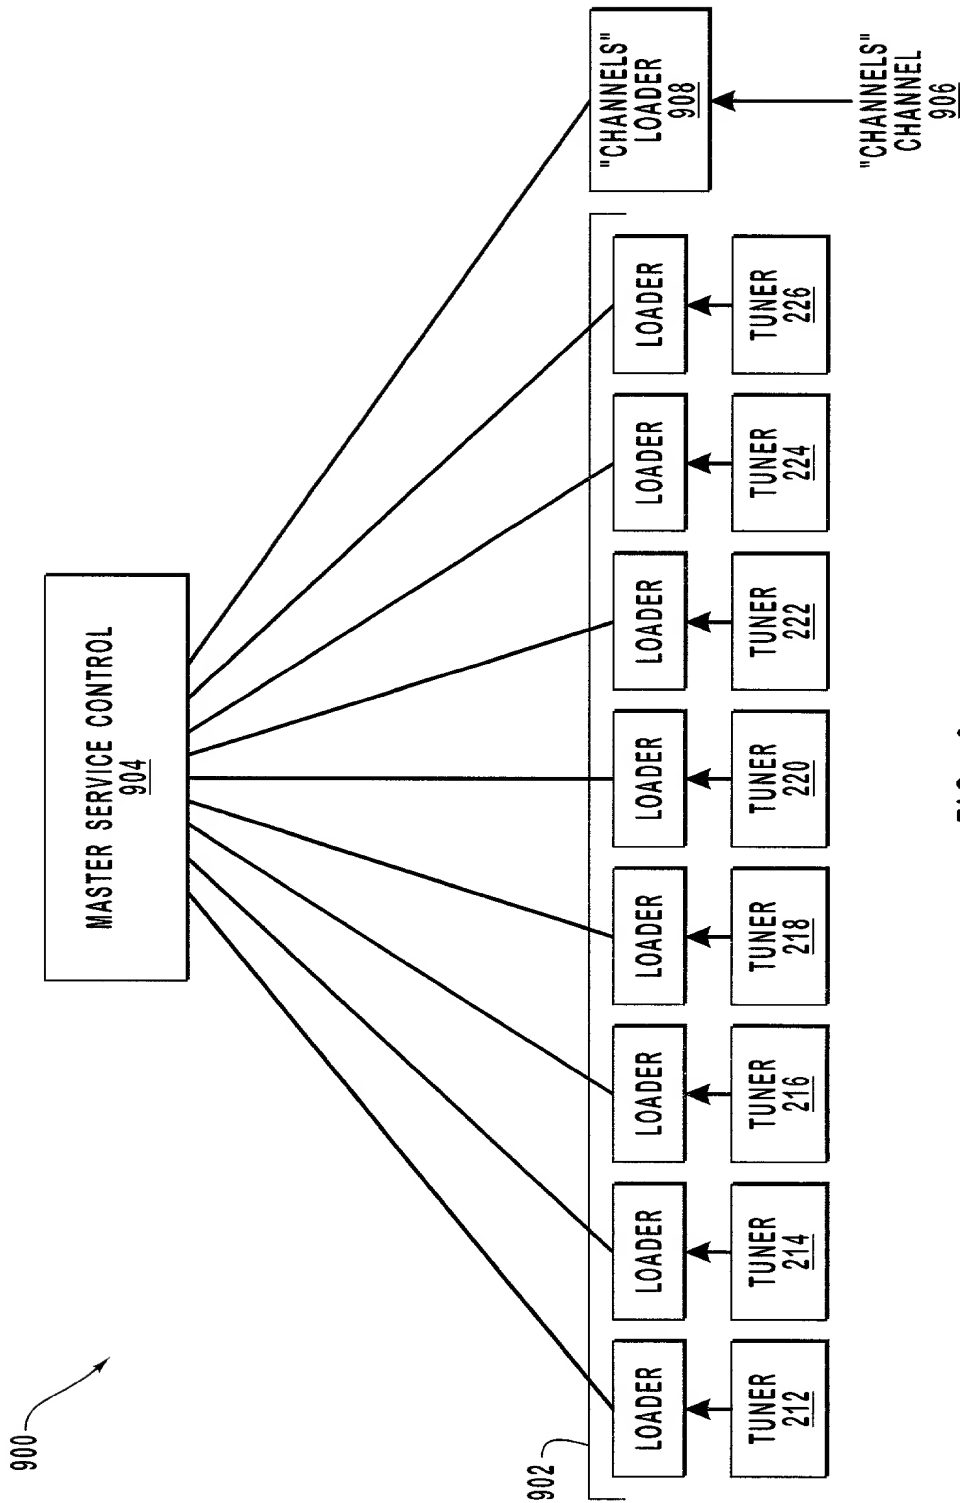


FIG. 9

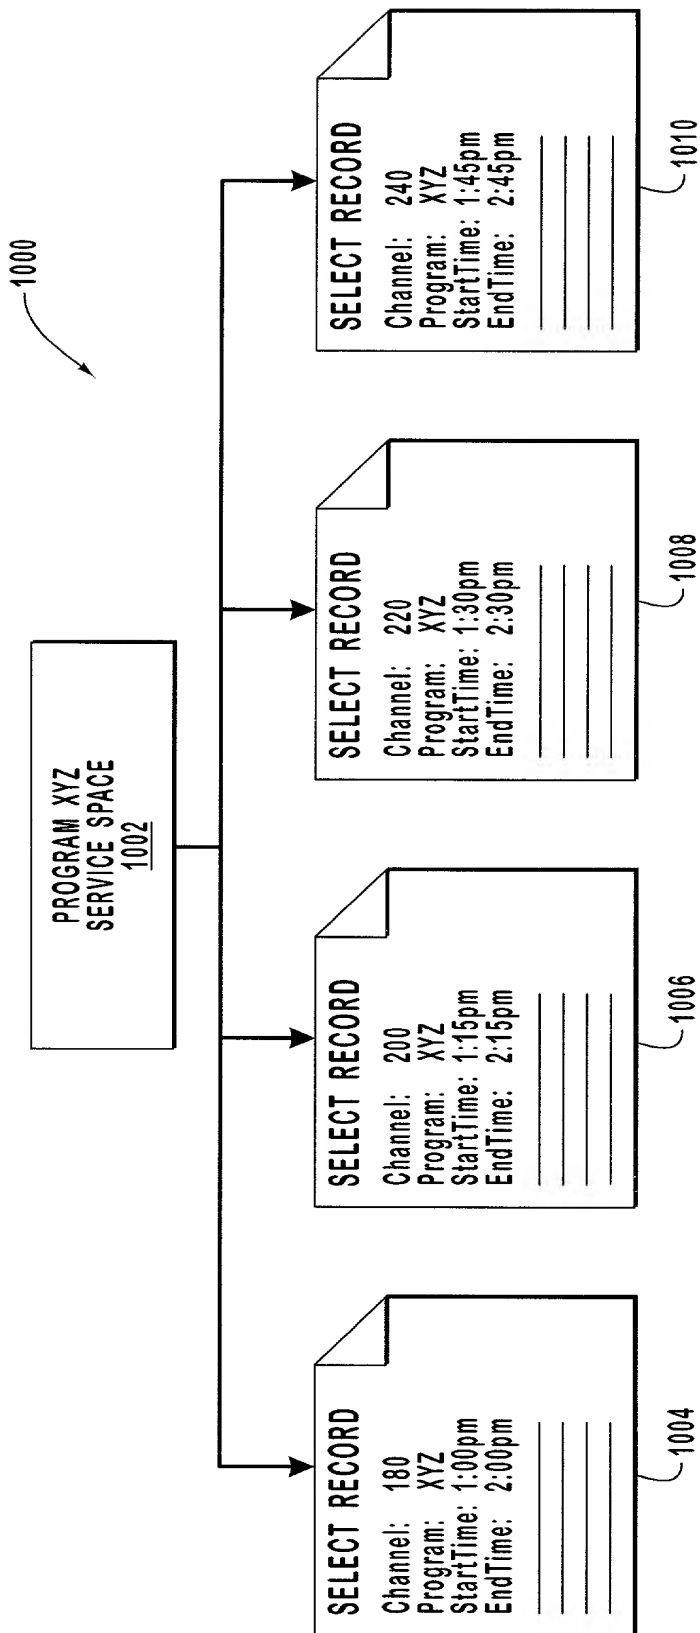


FIG. 10